



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification 6 : <b>G06F 17/30</b>		<b>A1</b>	(11) International Publication Number: <b>WO 97/46957</b>
			(43) International Publication Date: 11 December 1997 (11.12.97)
(21) International Application Number: <b>PCT/US97/09542</b>		(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>2 June 1997 (02.06.97)</b>			
(30) Priority Data: 08/659,058      4 June 1996 (04.06.96)      US		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: TALLPINE TECHNOLOGIES, INC. [US/US]; Suite 150-408, 6525 Gunpark Drive, Boulder, CO 80302 (US).			
(72) Inventor: SAMPSON, Jerold, Russell; 86 Tall Pine Lane, Boulder, CO 80302 (US).			
(74) Agents: GRAZIANO, James, M. et al.; Duft, Graziano & Forest, P.C., Suite 140, 1790-30th Street, Boulder, CO 80301-1018 (US).			

(54) Title: METHOD AND APPARATUS FOR MULTIMEDIA PRESENTATIONS

## (57) Abstract

The SGML based script language and application is designed to produce multi-media presentations for CD-ROM, kiosk and Internet information products. The SGML based script language supports two basic object classes: resources and widgets. The resources are static objects which include such things as bit maps, audio, movies, areas, and events. Resources are static objects, since they do not process input data nor perform any actions. Widgets are objects which can perform actions, process events, and respond to user provided input. The SGML based script language exploits standard SGML syntax and uses tags with a well defined syntax and meaning to describe both resource objects and widget objects. This SGML based

script produced presentation consists of a set of plates, each of which comprises a display screen which contains widget objects. An end user interacts with the widget objects located on a plate by pointing the cursor at one of the widget objects located on the display screen produced by the selected plate and/or clicking at this selected point on the display screen. The widget object so selected by this user operation responds by performing some predefined operation, which can include branching to another plate. When a widget object receives an event stimulus, it changes state and exhibits a set of predefined responses and/or behaviors. By creating widget objects that are dynamic in their behavior, as defined by the SGML object language, the resultant display presentation is responsive to the user's input to the system.

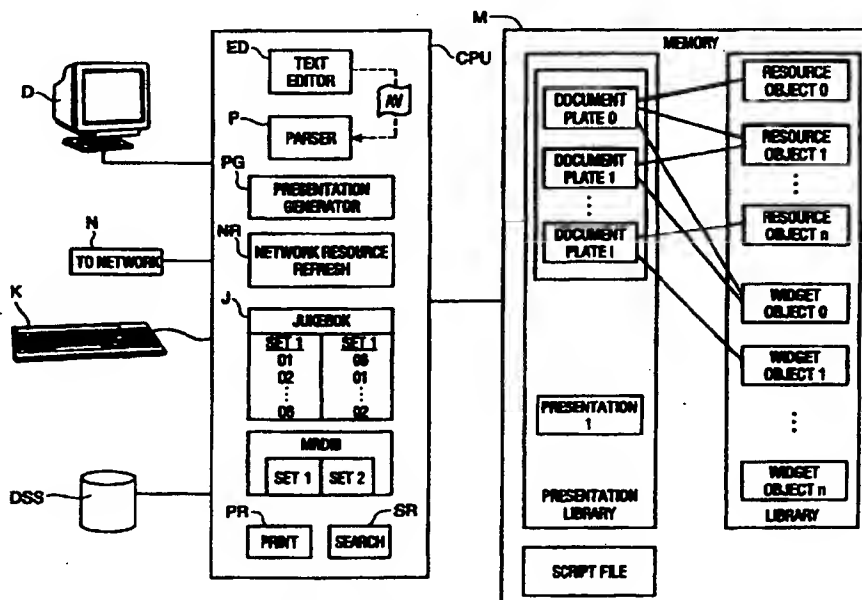

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD AND APPARATUS FOR MULTIMEDIA PRESENTATIONS

### Field of the Invention

This invention pertains to electronic media presentation systems, and, in particular, to a method and apparatus that functions to combine media objects of multiple diverse types into an integrated multimedia presentation.

### Problem

It is a problem in the field of electronic media presentation generation systems to efficiently and simply integrate the diverse types of media that are available to the user into a multimedia presentation for publication on an electronic media. It is even more difficult to create a presentation that is dynamic in nature and yet is simple to create.

It is well known in the presentation generation arena to create multimedia presentations which contain textual, graphical, audio, and even video segments. These presentation generation systems are video based and enable the user to create a user defined visual image on a frame by frame basis. The user must populate the individual frames with either graphical or textual material. The resultant frame of information is compiled and a data file created representative of the image that is presented to the user. Within this frame can be embedded option "buttons" which enable the user to select, by means of manipulating the cursor, one of the buttons and then click on the button to activate the presentation to proceed to a successive frame of information. By enabling the user to select the various options that are provided in the presentation, the user can step through the materials in the presentation in a user desired order.

A particular problem with these existing presentation generation systems is that the produced presentations are basically static in nature and merely merge textual, graphical, audio and visual segments into a frame in a static manner, which frame is then converted into a data file which cannot be modified by the designer or the user. Thus, these presentation generation systems produce output that is immutable in nature and are difficult to use in terms of editing and adapting to the changing needs of the ultimate users. In addition, the frames comprise a significant amount of data which, if transmitted over a communication medium, require a high bandwidth transmission connection and consume a significant amount of transmission time. The presentation generation systems also operate with multi-

media delivery systems which assume a single fixed resolution or presentation size. They have no ability to effectively accommodate different screen sizes or the ideal resolutions required for printing. Virtually all presently available systems presume VGA format presentations (640x480 at 256 colors). This resolution is unacceptable

5 given new multi-media personal computers. Furthermore, these multi-media products are time consuming to create and are one of a kind items. The traditional script language environment used to create multi-media presentations is difficult to use and requires significant programming expertise.

There presently is no system that can expeditiously enable the designer to

10 incorporate video and audio into a presentation or to enable simple editing of the presentation by the designer. In addition, there is no system which enables the creation of a dynamic presentation that adapts to the needs of the particular user who is accessing the presentation.

#### Solution

15 The above described problems are solved and a technical advance achieved in the field by the method and apparatus for generating multimedia presentations of the present invention. The preferred embodiment of this method and apparatus disclosed herein is an object based script language (hereafter Smart Widgets Script (SWS)) and application which is designed to produce multi-media presentations for

20 multi-media CD-ROM, kiosk and Internet information products. The object based script language uses an SGML based syntax and style to support two basic object classes: resource objects and widget objects. The resource objects are static objects which can be referenced and include (but not limited to) such things as images, graphics metafiles, wave files, movies, areas, and events. Resource

25 objects are static objects, since they do not process input data nor perform any actions. In contrast, widget objects are dynamic objects which can perform actions, process events, and respond to user provided input data. The SGML based script language exploits the ISO standard SGML syntax and uses tags with a well defined syntax and meaning to describe both resource objects and widget objects.

30 A SWS based presentation consists of a set of document plates, each of which comprises a display screen which contains some number of widget objects. The document plates can be considered the equivalent of pages, except the

document plates produced by this SWS based script language are not linear in their interrelationship. An end user interacts with the widget objects located on a document plate by pointing the cursor at one of the widget objects located on the display screen produced by the selected plate and/or clicking at this selected point  
5 on the display screen. The widget object so selected by this user operation responds by performing some predefined operation, which can include branching to another document plate. The widget objects have multiple states: on, off, and hidden. When a widget object receives an event stimulus or is clicked, it changes state and exhibits a set of predefined responses and/or behaviors. By creating  
10 widget objects that are dynamic in their behavior, as defined by the SWS object language, the resultant display presentation is no longer a static presentation as in the prior art, and is adaptable, as a function of the user's input to the presentation system.

The document plates that are created to produce the presentation are not  
15 scrollable, they are each a full screen presentation space onto which the author of the document plate places text, image, and graphics resource objects. The script used to create the document plates is produced by use of a standard text editor program, with the user entering the SGML markup or tags in a text format. The presentation engine which generates the presentation receives the text editor  
20 produced script and directly interprets the script source data to present the specified visual and audio content and associated display behaviors. The presentation engine is constructed from an extendable set of C++ objects which represent the SGML SWS object constructs and which provide presentation behavior at the document plate level. Both sets of objects are related and can be  
25 extended easily to provide custom application support.

As a result of the above noted capabilities, the method and apparatus for generating multimedia presentations of the preferred embodiment of the invention enables a designer to produce a multimedia presentation which incorporates text and/or graphics and/or video and/or audio information into a single integrated  
30 product. The presentation script that is created is simple to edit using the SGML based script language. The resource and widget objects inserted into the presentation can be modified or replaced or manipulated in an efficient manner

since they are defined via a simple SGML based script language. The author is able to insert variable behavior into the presentation and the presentation itself automatically adapts to different resolution display devices and print output. These capabilities are presently unavailable in existing multimedia presentation systems and represents a significant advance in the art.

### **Brief Description of the Invention**

Figure 1 illustrates in block diagram form the overall architecture of a preferred embodiment of the system of the present invention;

Figures 2-11 illustrate a selection of screen displays indicative of a typical real estate presentation; and

Figure 12-15 illustrate screen displays indicative of a talent agency presentation.

### **Detailed Description**

Figure 1 illustrates an architectural diagram of the preferred embodiment of the invention. The method and apparatus for generating multimedia presentations of the preferred embodiment of the present invention disclosed herein is an object based script language and application which is designed to produce multi-media presentations for multi-media CD-ROM, kiosk and Internet information products. The object based script language uses an SGML based semantic to support two basic object classes: resource objects and widget objects. The resource objects are static objects which can be referenced and include (but not limited to) such things as images, graphics metafiles, wave files, movies, areas, and events. Resource objects are static objects, since they do not process input data nor perform any actions. In contrast, widget objects are dynamic objects which can perform actions, process events, and respond to user provided input data. The SGML based script language exploits the ISO standard SGML syntax and uses tags with a well defined syntax and meaning to describe both resource objects and widget objects.

### **Basic SGML Characteristics**

The SGML based script language and application of the preferred embodiment of the present invention is designed to produce multi-media presentations for multi-media CD-ROM, kiosk and Internet information products.

A typical implementation of such a language is disclosed in Appendix A, attached hereto, as an example of the constructs that can be used to produce the SGML based script which is used by a presentation driver to produce the multi-media presentations. In addition, Appendix B, attached hereto, provides an example of  
5 some of the script that is produced using the language constructs of this system.

SGML is an existing standard which provides a framework for authoring information. It does not prescribe any particular semantic but, instead, provides a flexible framework for syntax and enables the author to define any desired custom document structure and semantic. The SGML standard is like a language in that  
10 it does not define an expression or idea but merely provides a means of expressing one. There are many SGML document types which describe specific document formats or layouts. These SGML document formats are focused on conventional pages of paper documents. HTML is an example of a variant of SGML and comprises a marginal expression that adds hyper-linking to the conventional SGML  
15 document model. HYTIME is another extension to conventional SGML that attempts to add temporal elements to a standard paper document. None of these extensions take the object oriented path to use SGML to define active objects and presentation objects, since the paradigm embraced by all of these existing SGML and SGML-like products is paper/page document based. There are no products  
20 which introduce random or non-repetitive behavior. To obtain such behavior requires the use of procedural language programming which requires the use of expert programmers and the expenditure of significant programming resources.

#### SGML Based Script Language

As noted above, the SGML based script language of the preferred  
25 embodiment of the invention supports two basic object classes: resource objects and widget objects. The resource objects are static objects which can be referenced and include (but not limited to) such things as bit maps, wave files, movies, areas, and events. Resource objects are static objects, since they do not process input data nor perform any actions. In contrast, widget objects are  
30 dynamic objects which can perform actions, process events, and respond to user provided input data. The SGML based script language exploits the ISO standard

SGML syntax and uses tags with a well defined syntax and meaning to describe both resource objects and widget objects.

5 A SGML based script produced presentation consists of a set of document plates, each of which comprises a display screen or presentation space which contains some number of widget objects. The document plates can be considered the equivalent of pages, except the document plates produced by this SGML based script language are not linear in their interrelationship. An end user interacts with the widget objects located on a document plate by pointing the cursor at one of the widget objects located on the display screen produced by the selected document  
10 plate and clicking at this selected point on the display screen. The widget object so selected by this user operation responds by performing some predefined operation, which can include branching to another document plate. The widget objects have multiple states: on, off, and hidden. When a widget object receives an event stimulus or is clicked, it changes state and exhibits a set of predefined  
15 responses and/or behaviors. By creating widget objects that are dynamic in their behavior (jukeboxes and the like), as defined by the SGML object language, the resultant display presentation is no longer a static presentation as in the prior art, and is adaptable, as a function of the user's input to the system.

The document plates that are created to produce the presentation are not  
20 scrollable, they are each full screen presentation spaces onto which the author of the document plate places text, image, and graphics resource objects. The script used to create the document plates is produced by use of a standard text editor program, with the user entering the SGML markup or tags in a text format, which text output can be edited by the author in a simple manner using a standard text  
25 editor program. The presentation engine which generates the presentation receives the text editor produced script and directly interprets the script source data to present the specified visual and audio content and associated display behaviors. The presentation engine is constructed from an extendable set of C++ objects which represent the SGML widget object constructs and which provide presentation  
30 behavior at the plate level. Both sets of objects are related and can be extended easily to provide custom application support.



**System Operation for Document Creation**

Figure 1 illustrates a typical implementation of the electronic media presentation system, which comprises a set of hardware elements, a set of processes which execute on the processor, and data which resides in memory.

- 5 The basic hardware elements comprise a user input device, such as keyboard K, a display element D, a processor CPU on which the multimedia presentation processes execute, processor memory M, additional memory, such as disk memory MSS, and, optionally, data communication media, such as network N. Additional hardware elements can be included in the system and the configuration illustrated
- 10 herein is simply illustrative of the concepts of the present invention and not intended to limit the scope of the invention. Likewise, the processes which execute on the processor CPU can include data which may be stored in memory M or the processes themselves may reside in memory M until activated. The architectural diagram of Figure 1 simply illustrates that the presentation engine PE comprises a
- 15 plurality of processes, which function to manage and utilize the data that is stored in memory M and disk memory MSS. The system illustrated in Figure 1 can be used to create and/or run the multimedia presentations and will be described in the context of performing both functions for the purpose of illustration.

- In operation, the user typically interfaces with the electronic media presentation generation system 1 by means of a keyboard K and/or a mouse (not
- 20 shown) or other such user input device. The media presentation system 1 is illustrated in Figure 1 and comprises a processor CPU which accesses the presentation script data which is stored in a memory M and produces a screen display from this stored data for display on the associated display device D. A
- 25 presentation engine PE executes on the processor CPU and the presentation engine PE can include various feature subroutines, such as: presentation generation PG, parser P, network resource refresh NR, jukebox J, print PR, search SR processes illustrated in Figure 1. In addition, presentation data is stored in the memory M and comprises presentations, resource objects, and widget objects. As
- 30 can be seen from this architecture, the author of a presentation can update resource objects without having to rewrite the presentation script and the presentations can be altered by modifying widget objects and/or the presentation

itself. This architecture enables simple presentation creation, modification and presentation via the use of modules which are substantially independent of each other yet cooperatively operative to produce the multimedia presentation.

The presentation designer creates the multimedia presentations by use of  
5 a standard text editor program ED resident on the processor CPU to create a data file AU comprising the SGML based syntax which defines the presentation. An example of the types of textual data that are created for this purpose is provided in Appendix B which represents the document plate definitions and image definitions for some of the presentation document plates shown in the example of Figures 12-  
10 15 described below. The edited text data AU is processed by the parser process P of the presentation engine PE to create the presentation and its component elements, which are stored in memory M.

In particular, each presentation comprises a collection of document plates. The presentations and their document plates are stored in a presentation library PL  
15 in memory M, with each presentation being illustrated as a separate element in Figure 1. Each document plate comprises a plurality of resource objects and widget objects, whose presence on the document plate is defined by the document plate definition. The exact identification of a resource object that is to be displayed on a particular document plate may be deferred until the user selects the particular  
20 document plate, and/or may change over time and in response to other stimuli as described below. The document plates are ordered in a predefined ordering in the presentation, even though this ordering may not correspond to the order of presentation to the user, since the presentation is typically a function of the user provided input, rather than a static sequence of images. There is always an initial  
25 document plate which is designated to enable the presentation process to launch the presentation by presenting an initial screen display to the user. The illustration of Figure 1 is conceptual, in that a document plate, such as document plate 0, can comprise the entirety of the resource objects 0, 1 and the widget objects 0, which comprise the document plate, written in a simple text data file. The present  
30 illustration is used to indicate that resource objects and widget objects are independent of the document plates in their definition and content and can be managed independent of the document plates. The document plate can be

envisioned as a linked list of resource objects and widget objects which are administered via document plate definition information. In addition, the resource objects simply comprise display definition data, not the display content. The display content is typically stored independent of the resource object, such as on disk memory MSS, and retrieved only when the resource object is activated by the presentation generation process PG to create a display image.

### **Widget Objects**

An SGML tag has the following typical format: <id[parm][parm][parm]> , wherein the term "id" comprises the identification of a function and the term "parm" comprises a parameter which consists of a pair of entries which are a value syntax and an associated value. By using and exploiting document structuring tags, the author can share work with others, reduce the redundant markup of scripts and control the structure of the resultant work. The resource objects are external objects which are referenced by the widget objects and acted upon by the presentation generation process PG. The resource objects have no presentation semantic and are processed during the document scanning phase. Widget objects are objects which have a presentation semantic. The widget objects are placed on one or more document plates and perform presentation actions in response to a user activating the widget object or an external event triggering the widget object. Each widget object is a state machine in that it exhibits a predefined behavior and can both generate events and respond to events (including timer events).

### **Presentation Generation**

The presentation generation process PG responds to a user selecting a presentation via a menu or other well known selection artifact, by locating the selected presentation, such as presentation O, and retrieving the first document plate (document plate 0) in the presentation. The presentation generation process PG responds to the activation of a document plate by reading the script which comprises the document plate and following the actions prescribed therein to create the image to be presented to the user as the screen display. The widget objects are represented as buttons or activatable fields or portions of the display. The resource objects may be updated in an automatic manner by ascribing refresh criteria with the resource object definition to enable the network resource refresh

process NR to be activated at a time or in response to a predefined event noted by the refresh criteria associated with the resource object. The activated network resource refresh process NR searches for resource refresh data, typically by accessing network N, such as Internet or a private corporate network, and searching a specified network path to locate the refresh data. The located refresh data is downloaded from the network N and this retrieved data replaces the present instance of the resource object which is stored in disk drive memory MSS. Similarly, the author of a presentation can define a set of resource objects and/or resource object characteristics that are to be "randomized" by the presentation process. This is accomplished by the jukebox process J which stores data indicative of a plurality of resource objects which are of the same base class of objects. This set of resource objects can be accessed to present seriatim the members of the set to the user as part of the presentation. Thus, each time a user accesses a predetermined document plate in a presentation, the resource object(s) presented therein are changed from the last presented resource object(s) to the next successive listed resource object in the set defined by the jukebox J. The resource objects can be varied as well as the resource object characteristics, such as background color, size, etc. Multiple concurrently operational jukebox processes J can be used in a document plate to vary different segments of the screen display. The jukebox processes J can also be further randomized by taking the initial ordering of the members of the set and scrambling this ordering each time all the members of the set have been accessed since the last scrambling. Thus, the numerically sequential ordering of set 1 shown in Figure 1 can be scrambled to the random ordering of set S2 shown in Figure 1. The members of set S2 are sequentially accessed via the ordering listed therein, and when the last member of set S2 has been accessed by a document plate, the jukebox process J re-randomizes the ordering presently used in that set. This jukebox process J adds a significant degree of apparent uniqueness to the presentation that is produced using this process.

Additional functions that can be implemented as part of the presentation process are the print process PR which provides a display screen print, a printed list of data (such as script file SF) which is present in a resource object or set of

objects, selective widget printing, and multi-resolution object substitution. Furthermore, the search process SR enables a user or widget object activated by a user to search through the resource objects to identify data which satisfies criteria defined by the user. The identified data can then be excerpted from the set of all  
5 resource objects and processed in well known data manipulation fashion to provide the user with information of a nature, ordering and presentation defined by the user. Examples of this process are described below.

#### **Automatic Display Sizing**

Multi-media delivery systems assume a single fixed resolution or  
10 presentation size. They have no ability to effectively accommodate different screen sizes or the ideal resolutions required for printing. Virtually all presently available systems presume VGA (640x480 at 256 colors). This resolution is unacceptable given new multi-media PCs. Multi-media titles are repetitive, in that the presentation is identical every time it is viewed. Multi-media products are time  
15 consuming to create and are one of a kind items. The traditional script language environment is difficult to use and requires significant programming expertise. The automatic transparent support for multiple presentation resolutions is unavailable. Thus, a presentation developed for a single target display must be reengineered to be capable of being displayed on another target display which is different from  
20 the first target display.

The presentation generation process PG overcomes this problem of existing systems by responding to the user requesting the full screen image of the selected view to create an image that satisfies the area and resolution requirements. This is accomplished by converting an image into an mrDib (multi-resolution) version of  
25 an image wherein a plurality of versions of the image are stored in the disk drive memory MSS, so that the stored images correspond to different presentation applications. Page 4 of the Appendix B illustrates such a case, where a plurality of image files are listed in a directory under the heading of "sample image definitions." The image definitions are grouped in this example by type of image:  
30 bitmap, jpeg, image size, and the like. The list of image definitions is followed on page 5 by a definition of a plurality of mrDibs, shown in Figure 1 as element MR. The mrDib is a unique image identifier which corresponds to a selected "picture".

with the list of entries in the mrDib representing various display formats of this image. Thus, the mrDib can be viewed as an OR function, which enables the resource object to specify a specific image, with the presentation generation process PG further specifying the presentation space corresponding to the characteristics of display D (or a printer) including: size, resolution, and display method. This collection of control data causes the mrDib process MR to identify the image file which most closely satisfies the identified requirements and retrieve the data file so identified. The retrieved data file is then used in the display creation process. The display device characteristics are determined in well known fashion by the processor P and the various display areas are scaled based upon authoring definitions and actual display resolution, so that the authored image is mapped into the final image. This image translation process portion of the presentation generation process PG can use features such as scaling, centering, wrapping, and the like to convert the stored image to the desired rendering on the presentation space which is provided.

#### **Typical Presentation Example**

In order to illustrate the operation of the system of the present invention, Figures 2-11 illustrate a selection of screen displays indicative of a typical multimedia real estate presentation that can be generated using this system. When the user of a kiosk, or Web site or CD-ROM disk activates the presentation process, the presentation generation process PG accesses the presentation which comprises a plurality of document plates and an associated collection of resource objects and widget objects. The document plates comprise the presentation framework via which the resource objects are presented to the user in response to the user or other stimulus activating widget objects which are associated with the document plates.

Figure 2 illustrates the initial display screen which is produced when the widget defined by the wplate widget object which defines the first document plate is accessed by the presentation process. This wplate widget object includes/contains a plurality of other objects which are used by the presentation process to create the display screen shown in Figure 2. In particular, there is a basic image comprising the background, text, logo, and button definitions that are

combined to produce this image. Each of the buttons which are displayed in Figure 2 comprise a separate widget object, which are activated, in this instance, by the user moving the cursor on to a selected button/image/area and/or clicking the mouse to activate the selected button/image/area. This stimulus causes the presentation process to activate the selected widget object to execute the behavior that is associated with this widget object. Most of the button options illustrated in Figure 2 are well known in the presentation field, it is their implementation that is unique. For example, the user can select the "Main Menu" button and click thereon to obtain the screen display of Figure 3. The activation of the widget object associated with this selected button is again a wplate widget object which defines another document plate, whose embodiment is shown in Figure 3. The main menu of Figure 3 is again a collection of resource objects and widget objects which are combined by the presentation process to create and manage the image shown in Figure 3. Each of the menu items comprises a widget object, which can be activated by the user to obtain further information. The directional arrows located at the bottom of the image enable the user to scroll in either direction if the main menu contains more entries than can be displayed on a single image.

Assume that the user has selected the menu option of "HOME OWNER Realty" by the point and click method. The presentation process activates the widget object which is associated with this selection and a new wplate object is activated to produce the display of Figure 4. This display screen comprises the images of six homes for sale in the "Janesville" area as well as realtor identification information. There are a number of control buttons included at the lower right hand corner of the display to enable the user to navigate through the presentation. If the user moves the cursor on to one of the pictures of the six homes shown in Figure 4, the display changes to that shown in Figure 5 wherein the system automatically prompts the user with a message "CLICK THIS IMAGE TO VIEW MORE DETAILS" to thereby enable the user to obtain additional information regarding the home so identified. If the user clicks on this selected home image, the screen display of Figure 6 is presented, which provides additional information as well as menu selections to enable the user to branch to other groups of home selections. Thus, the user can navigate the available selection of homes by

selecting a price range and location from this menu. The presentation system responds to such a combination of selections by searching the resource objects which satisfy these criteria and presenting the excerpted selections in a predefined format, such as that shown in Figure 5. Thus, the presentation is defined by the user input, and does not comprise a standard series of immutable pages. The data used to create the screen displays is defined by the operation of the widget objects, which are responsive to the user input.

For the purpose of simplicity, assume that the user selects and activates the "OK" selection to view additional information with respect to the displayed home. The presentation system responds to this selection by producing the screen display of Figure 7. A unique capability of this display screen is that the user can select one of the views shown in this display and activate the widget object associated therewith to blow up the image to full screen size. Such a display is shown in Figure 8.

#### 15 Location Map and Additional Area Information

In addition to the displays shown in Figures 2-8, location map and additional area information can be provided. In particular, by activating a menu entry (not shown) in the main menu of Figure 3, the user can retrieve a map, shown in Figure 9, of the area of interest. The map could also be accessed via the real estate screens of Figures 4-8, such that the selected residence elicits a detailed map of the location of the residence in the town. Furthermore, the employer information presented in Figures 10 and 11 can be accessed via menu and displays in Figure 10 a listing of employers and some relevant statistics. By the user placing the cursor on a particular entry on the screen, the display of Figure 11 is produced, wherein the bottom portion of the screen is updated to provide some detailed data regarding the selected employer.

#### Talent Agency Example

Figures 12-15 illustrate screen displays indicative of an employment agency presentation that can be generated using this system. Figure 12 illustrates the initial screen display which comprises a combination of resource objects and widget objects. The primary choices for the presentation, in addition to the music, sound, test volume and go back controls, are the four presentation controls located to the



left of center in the screen illustrated in Figure 12. For the sake of example, assume that the user selects the contact sheet presentation located in the upper left corner of the four presentation selections. The placement of the cursor on this "button" area and the user clicking on this selection causes the presentation

5 process to retrieve the document plate associated with this option and produce the screen display of Figure 13. The screen display of Figure 13 provides the user with the typical presentation scrolling controls along the upper margin of the screen. In addition, a plurality of photos of models are arranged in a matrix layout. The selection of the photographs for this matrix layout is static, in that the collection

10 shown in Figure 13 is predetermined to populate the photo locations of the contact sheet of Figure 13. The user can position the cursor over one of the photos, which operation causes the name of the selected model to be displayed, as shown in Figure 13 with the name "Jill Blair" being displayed on the photo which is presently being pointed to by the cursor.

15 If the user selects one of the photos of the contact sheet of Figure 13 by the cursor position and click operation, additional information is presented to the user in the form of the screen display of Figure 14. This screen display illustrates a variety of information, textual information providing descriptive information regarding the selected individual, and various multi-media presentation information.

20 In particular, the widget objects that are presented herein include a slide show, additional photos, a resume, and a voice clip. Thus, by selecting the appropriate selection, the user can receive textual, and/or audio, and/or video information relating to the selected individual. This additional information is in the form of specific resource objects which can be updated without having to modify the

25 presentation. The screen display can also be printed as shown by the selection and operation of the "PRINT" button. Furthermore, the user is presented with a calendar option, the selection of which produces the screen display of Figure 15. This screen display enables the user to select the month of the year by selection of the corresponding option button on the top of the screen, which causes the body

30 of the calendar to be populated with the corresponding calendar format data. The calendar includes the photograph selected by the user in the prior screen of the

presentation. This calendar page can be printed by the operation of the "PRINT" button on the screen display.

- While a specific embodiment of the invention has been disclosed herein, the implementation details which are presented are not intended to limit the scope of
- 5 the invention as defined in the appended claims, since it is envisioned that alternate embodiments of this invention can be created which fall within the intended scope of the invention.

**WHAT IS CLAIMED:**

1. Apparatus for generating a multimedia presentation, which consists of a plurality of document plates for display on a display device, comprising:
  - means, using SGML based syntax, for defining a plate layout for each of said document plates, said plate layout comprising a plurality of object based tags,
  - 5 each object based tag defining an instance of an object;
  - means, using object based syntax, for defining resource objects, each of said resource objects comprising a static graphical or textual content for display on said display device;
  - means, using SGML based syntax, for defining widget objects, each of said
  - 10 widget objects comprising an active display element for display on said display device, each of said widget objects being responsive to a stimulus for performing a predefined action;
  - means, responsive to activation of a predefined first of said plurality of said document plates, for producing a screen display, defined by said first document
  - 15 plate, on said display device; and
  - means, responsive to user input, for controlling rendering of said resource objects and other ones of said plurality of document plates onto said display device.
2. The apparatus of claim 1 wherein said means for producing comprises:
  - means, responsive to said display device which has predefined characteristics including: size, resolution, and display method, for rendering said
  - 5 screen display to encompass substantially the entirety of said display device.
3. The apparatus of claim 2 wherein said means for producing further comprises:
  - means for managing each of said resource objects selected for display on said display device as a multi-resolution image resource; and
  - 5 presentation means responsive to receipt of a multi-resolution image resource for activating at least one of a scaling method to size an image produced

from said multi-resolution image resource and a drawing mode to set display resolution for an image produced from said multi-resolution image resource.

4. The apparatus of claim 2 wherein said means for rendering comprises:

means for storing a plurality of images, each of which comprise a different version of a common base image; and

5 means for selecting a one of said plurality of stored images in response to said predefined characteristics of said display device.

5. The apparatus of claim 1 wherein said means for producing comprises:

means, responsive to said display device comprising a printer which has predefined characteristics including: size, resolution, and display method, for  
5 rendering said screen display onto a print format to encompass substantially the entirety of a print media processed by said printer.

6. The apparatus of claim 1 further comprising:

jukebox means, operable on a set of said resource objects which said resource objects contained in said set being of equivalent base class, for providing a sequence of said resource objects contained in said set.

7. The apparatus of claim 6 further comprising:

means for shuffling said sequence of said resource objects contained in said set to randomize an order of presentation of said resource objects contained in said set.

8. The apparatus of claim 7 wherein said means for shuffling sequences through all members of said set of said resource objects before restarting the cycle of presenting said resource objects contained in said set.

9. The apparatus of claim 6 wherein said jukebox means operates on resource objects and resource object characteristics including, but not limited to: color, background, event, screen area location, and plate.

10. The apparatus of claim 6 wherein multiple ones of said jukebox means are concurrently operational on a said document plate presently extant on said display device.

11. The apparatus of claim 1 wherein each of said resource objects are defined and identified by name, which name is associated with a path which enables a processor to locate said identified resource object which is stored in memory.

12. The apparatus of claim 11 wherein said apparatus is connected to a communication network, said apparatus further comprises:

means, responsive to resource object refresh criteria, for periodically retrieving a latest version of said resource object, the periodicity of said periodically  
5 retrieving being defined by said refresh criteria.

13. The apparatus of claim 1 wherein each of said widget objects are associated with a locus on at least one of said document plates, said apparatus further comprising:

means for sizing the relative size of screen to match presentation format  
5 supported by said display device with said widget object location proportionately changed to match a relative position on the original screen.

14. The apparatus of claim 1 wherein a widget object is toggled between on and off states, with behavior of the widget object being defined by object based tag attribute value pairs associated with said widget object.

15. A method for generating a multimedia presentation, which consists of a plurality of document plates for display on a display device, comprising the steps of:

defining, using SGML based syntax, a plate layout for each of said document  
5 plates, said plate layout comprising a plurality of object based tags, each object based tag defining an instance of an object;

defining, using SGML based syntax, resource objects, each of said resource objects comprising a static graphical or textual content for display on said display device;

10 defining, using object based syntax, widget objects, each of said widget objects comprising an active display element for display on said display device, each of said widget objects being responsive to a stimulus for performing a predefined action;

producing, in response to activation of a predefined first of said plurality of  
15 said document plates, a screen display, defined by said first document plate, on said display device; and

controlling, in response to user input, rendering of said resource objects and other ones of said plurality of document plates onto said display device.

16. The method of claim 15 wherein said step of producing comprises:  
rendering, in response to said display device which has predefined characteristics including: size, resolution, and display method, said screen display to encompass substantially the entirety of said display device.

17. The method of claim 16 wherein said step of producing further comprises:

managing each of said resource objects selected for display on said display device as a multi-resolution image resource; and

5 activating, in response to receipt of a multi-resolution image resource, at least one of a scaling method to size an image produced from said multi-resolution image resource and a drawing mode to set display resolution for an image produced from said multi-resolution image resource.

18. The method of claim 16 wherein said step of rendering comprises:  
storing a plurality of images, each of which comprise a different version of  
a common base image; and  
selecting a one of said plurality of stored images in response to said  
5 predefined characteristics of said display device.

19. The method of claim 15 wherein said step of producing comprises:  
rendering, in response to said display device comprising a printer which has  
predefined characteristics including: size, resolution, and display method, said  
screen display onto a print format to encompass substantially the entirety of a print  
5 media processed by said printer.

20. The method of claim 15 further comprising the step of:  
ordering a set of said resource objects which said resource objects  
contained in said set being of equivalent base class, to provide a sequence of said  
resource objects contained in said set.

21. The method of claim 20 further comprising the step of:  
shuffling said sequence of said resource objects contained in said set to  
randomize an order of presentation of said resource objects contained in said set.

22. The step of claim 21 wherein said step of shuffling sequences through  
all members of said set of said resource objects before restarting the cycle of  
presenting said resource objects contained in said set.

23. The method of claim 20 wherein said step of ordering operates on  
resource objects and resource object characteristics including, but not limited to:  
color, background, event, screen area location, and plate.

24. The method of claim 15 wherein each of said resource objects are  
defined and identified by name, which name is associated with a path which

- enables a processor to locate said identified resource object which is stored in memory and wherein said processor is connected to a communication network,
- 5 said method further comprises the step of:
- periodically retrieving, in response to resource object refresh criteria, a latest version of said resource object, the periodicity of said periodically retrieving being defined by said refresh criteria.

25. The method of claim 15 wherein each of said widget objects are associated with a locus on at least one of said document plates, said method further comprising the step of:

- sizing the relative size of screen to match presentation format supported by
- 5 said display device with said widget object location proportionately changed to match a relative position on the original screen.

26. The method of claim 15 wherein a widget object is toggled between on and off states, with behavior of the widget object being defined by object based tag attribute value pairs associated with said widget object.




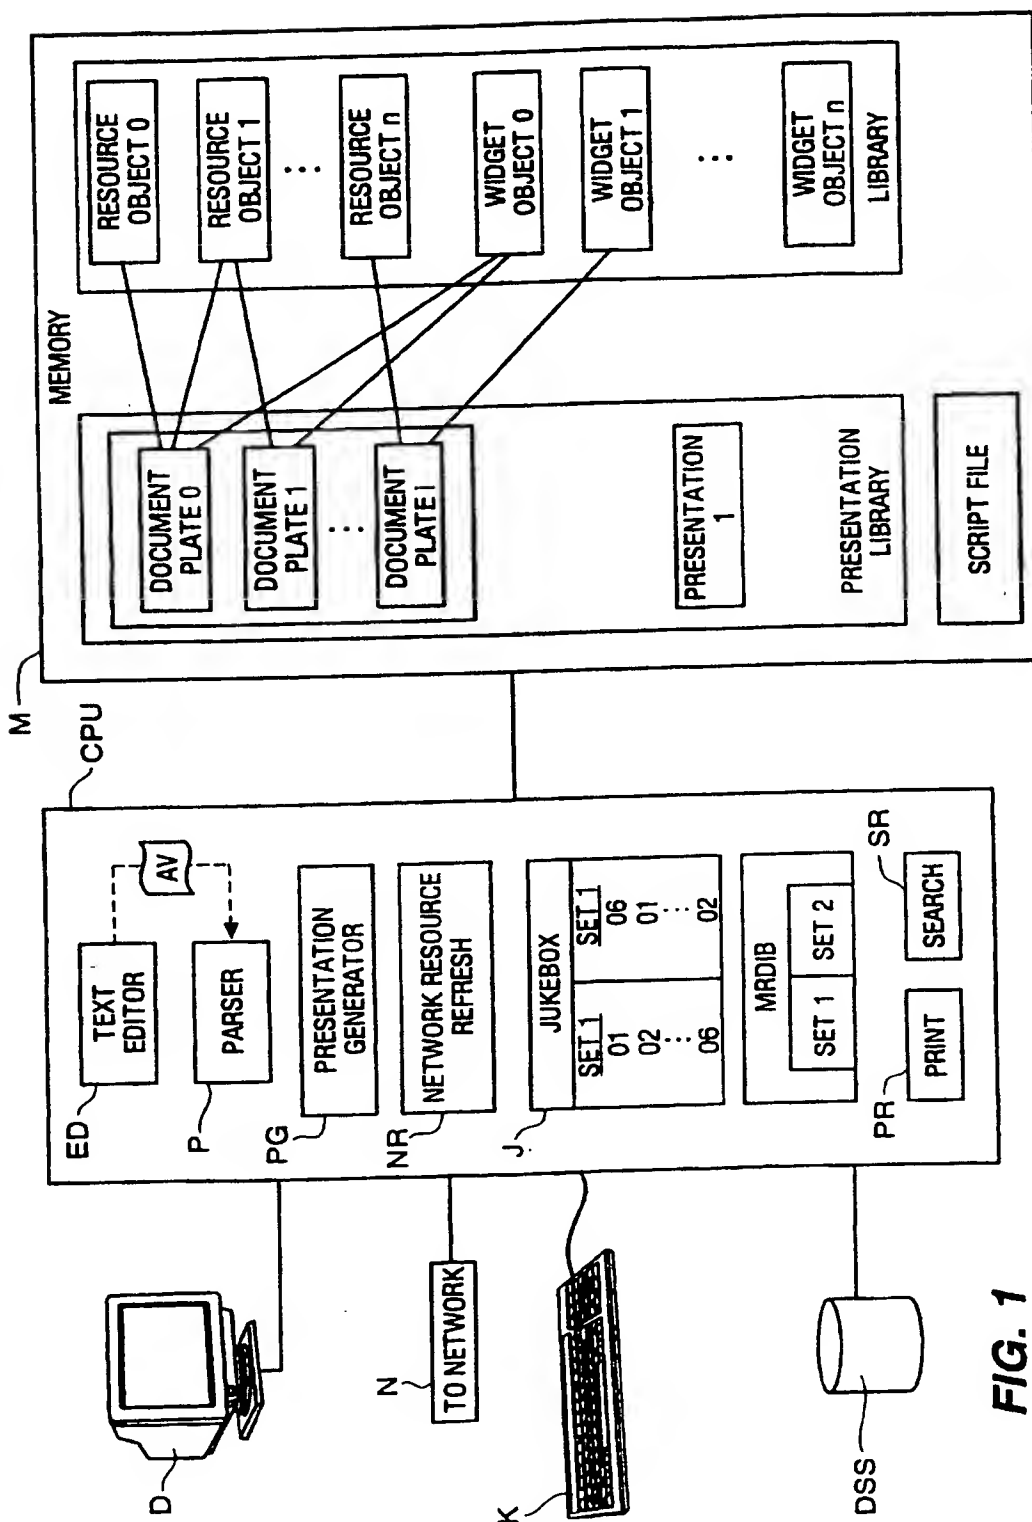



FIG. 1




**FIG. 2**

REALVIEW CD Shopper - Index of Advertisers	
<i>LOCATION Realty</i>	<i>PARK PLACE TOWNHOMES</i>
<i>BUYRITE Realty</i>	<i>Mortgage Connection Hotline</i>
<i>HOME BUYERS Realty</i>	
<i>Premium Page Layout</i>	
<i>Slide Show Page Layout</i>	
<i>Standard Page Layout</i>	

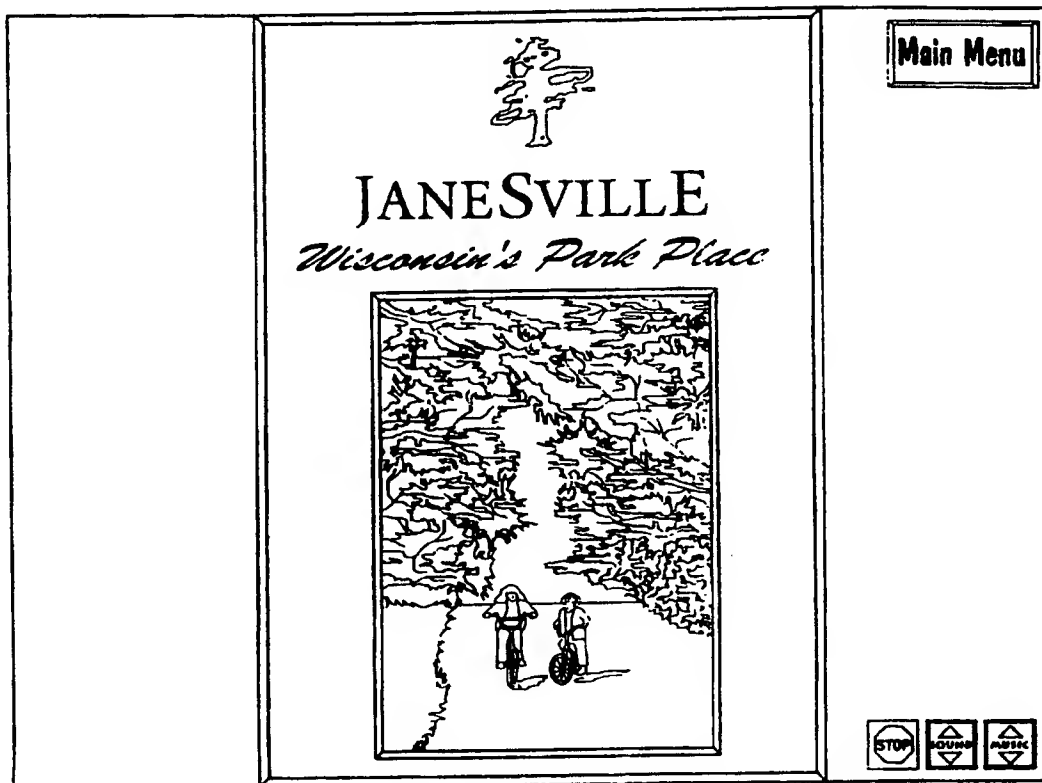

←


→




**FIG. 3**

<p>Fantastic 2 story colonial on wooded lot. \$329k.</p>	<p>Woodbury, former model. 4br 2ba. reduced \$229,900</p>	<p>Kenwood. 4br.. 2 ba.. finished rec.room. \$299k</p>
<p>CLICK ANY PHOTO FOR MORE INFORMATION</p>		
<p>Minneapolis. 4br. 2ba. fireplace. \$139,900a</p>	<p>Minnetonka. 4br. 3 ba. sunken LR w/9'ceilings. \$149k</p>	<p>4857 Winston - Mpls. Buyer motivated. Reduced.</p>
<div data-bbox="341 1050 584 1186"> <p><b>LR</b> Location Realty LOCATION LOCATION LOCATION 456-7890</p> </div> <div data-bbox="592 1039 990 1176"> <p>These are just some of the wonderful homes that Location Realty has to offer. Call Sandra Johnson at 899-8909 to find the one you want. We can locate that dream home you're looking for.</p> </div> <div data-bbox="998 1039 1112 1207"> </div> <div data-bbox="633 1186 982 1213"> <p>Call 898-123-8987 and ask for Sandra Johnson</p> </div>		
<div data-bbox="1136 1039 1218 1092"> <p>PREVIOUS PAGE</p> </div> <div data-bbox="1226 1039 1315 1092"> <p>PAGE FORWARD</p> </div> <div data-bbox="1136 1102 1218 1155"> <p>PRINT</p> </div> <div data-bbox="1226 1102 1315 1155"> <p>MAIN MENU</p> </div> <div data-bbox="1136 1165 1315 1218"> <p>HOUSE SEARCH</p> </div>		


FIG. 4




Fantastic 2 story colonial on wooded lot.  
\$329k.




Woodbury, former model. 4br 2ba.  
reduced \$229,900




Kenwood. 4br.. 2 ba.. finished rec.room.  
\$299k



Minneapolis. 4br. 2ba. fireplace. \$139,900a




Minnetonka. 4br. 3 ba. sunken LR  
w/9' ceilings. \$149k



4857 Winston - Mpls. Buyer motivated.  
Reduced.

CLICK ANY PHOTO FOR MORE INFORMATION


CLICK photo for more details



**Location Realty**  
LOCATION LOCATION LOCATION  
456-7890

These are just some of the wonderful homes that Location Realty has to offer. Call Sandra Johnson at 899-8909 to find the one you want. We can locate that dream home you're looking for.

Call 898-123-8987 and ask for Sandra Johnson



PREVIOUS PAGE

PAGE FORWARD

PRINT

MAIN MENU

HOUSE SEARCH

FIG. 5


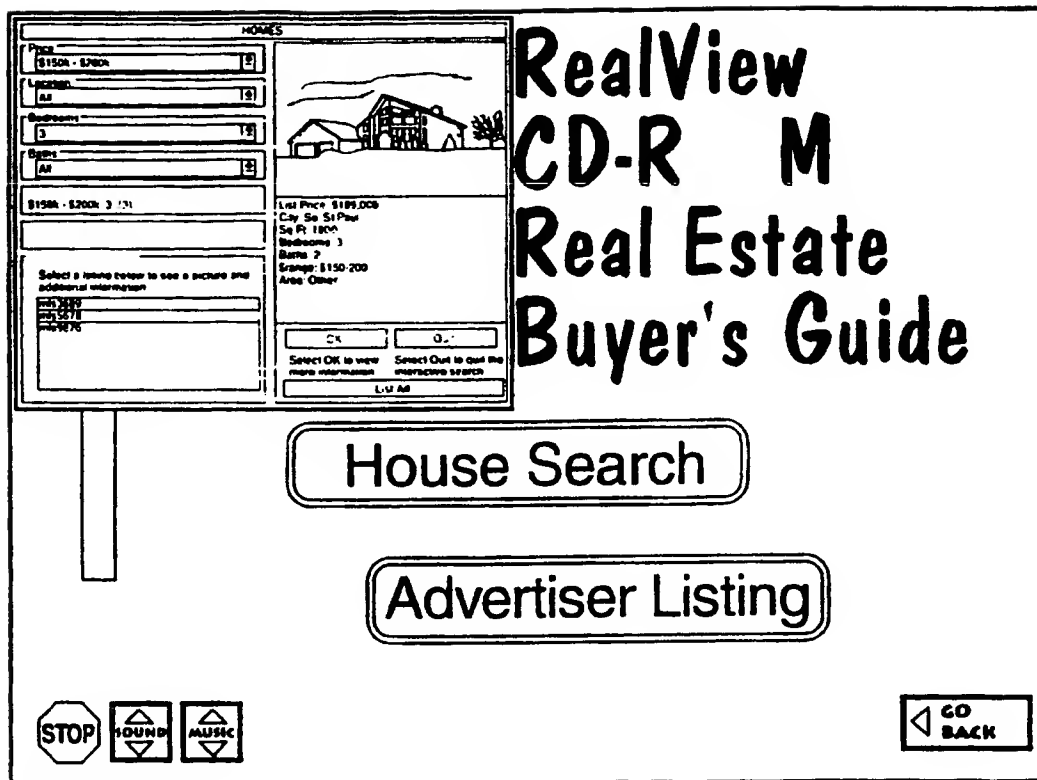


FIG. 6

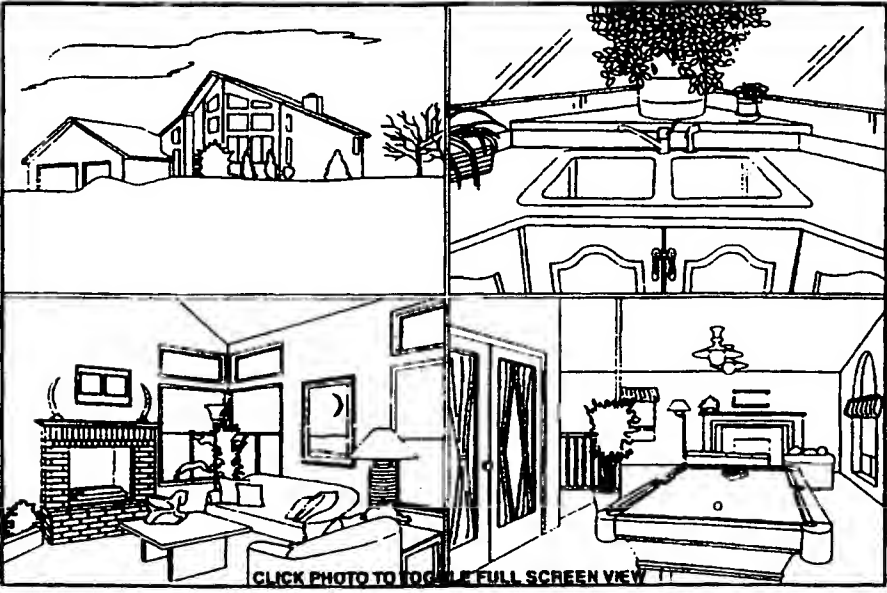


CLICK PHOTO TO TOGGLE FULL SCREEN VIEW

PAGE  
BACK

MAIN  
MENU

PRINT



Offered By:  
Julie Wilson


**3456 4th St. N., So. St. Paul 3BR 2BA Rambler \$189,000**  
Private, two story, corner home featuring 3 bedrooms & 2 baths. Also includes large four season porch w/vault & ceiling fan, main floor living room, separate dining area. Huge kitchen w/breakfast bar, second floor laundry, oak cabinets.

Sq. Ft.: 1800  
Year: 1986  
Garage: 2  
Lot: 75x155  
AC: Yes  
Fireplace: Yes

**Home Buyers**  
Real Estate  
*The Home Buyer's Friend*  
455-7410

FOR MORE INFORMATION ASK YOUR AGENT ABOUT PROPERTY mls5678

FIG. 7

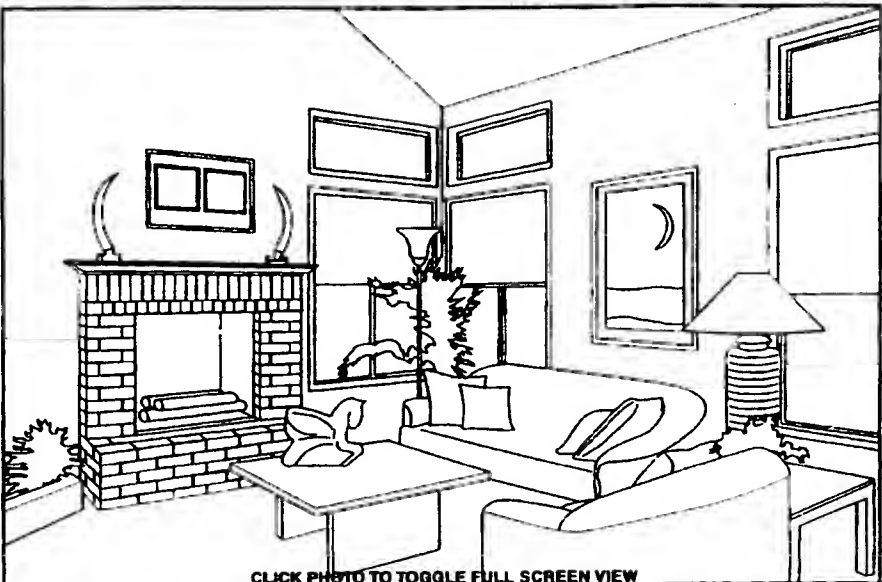

CLICK PHOTO TO TOGGLE FULL SCREEN VIEW

**3456 4th St. N., So. St. Paul 3BR 2BA Rambler \$189,000**  
 Private, two story, corner home featuring 3 bedrooms & 2 baths. Also includes large four season porch w/vault & ceiling fan, main floor living room, separate dining area. Huge kitchen w/breakfast bar, second floor laundry, oak cabinets.

Sq. Ft.: 1800  
 Year: 1986  
 Garage: 2  
 Lot: 75x155  
 AC: Yes  
 Fireplace: Yes

**Home Buyers**  
 Real Estate  
*The Home Buyer's Friend*  
 455-7410


Offered By:  
 Julie Wilson

PAGE BACK  
 MAIN MENU  
 PRINT

FOR MORE INFORMATION ASK YOUR AGENT ABOUT PROPERTY mls5678

FIG. 8



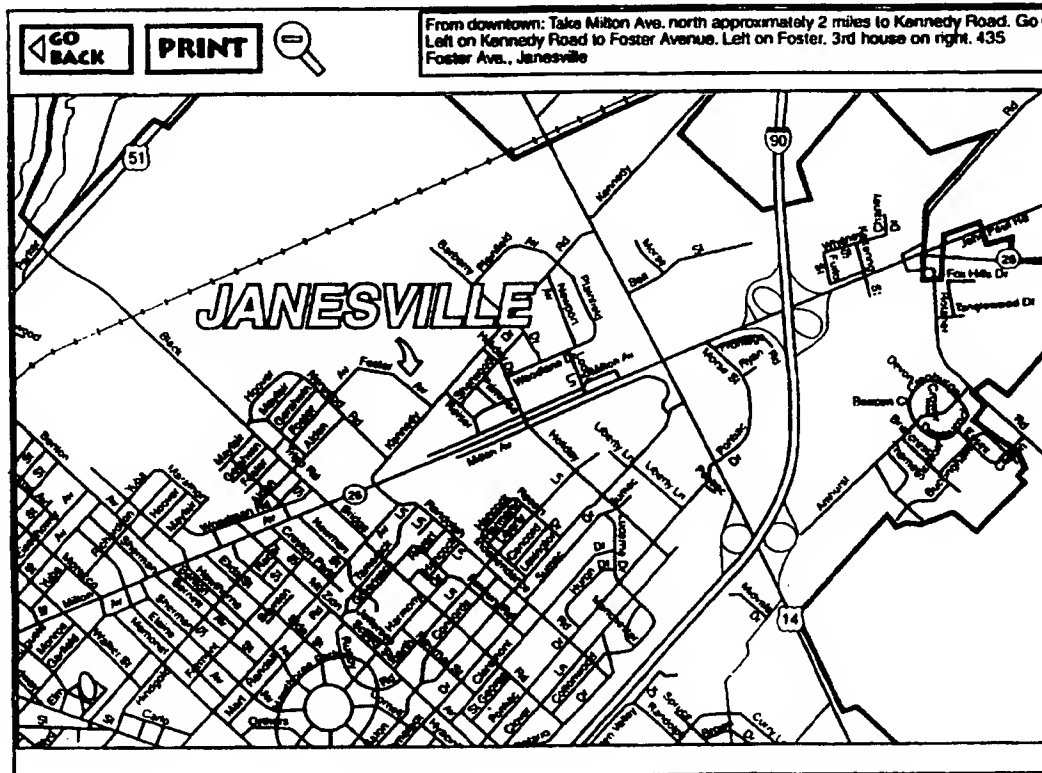

**FIG. 9**

EMPLOYERS

◀ GO BACK

START OVER

⏮ INDEX ⏭  
SEARCH

PRINT

Company	Product	Date Est.	No. Emp.	Union
General Motors	Auto/Truck Assembly	1923	6000	UAW
SSI Technologies	Powder Metals Products	1982	11,175	None
Lab Safety Supply	Safety Equip. & Supplies	1969	620	None
Accudyne	Ordinance	1971	575	UAW
Parker Pen USA LTD	Pens	1888	550	URW/IAM
Lear Seating	Seating for Motor Veh.	1980	475	UAW
Giddings & Lewis	Auto. Prod. Mach.	1935	450	IAM
Prent Corp.	Thermolorm Plastic Prod.	1967	406	None
HUFCOR	Moveable WalkPartition	1901	290	UFW
Monterey Mills	Pile Fabrics	1988	240	ALCW/ILGWU
Swing-N-Glide	Metal Fabricated Products	1982	200	None
Janesville Group	Silk Screening	1987	180	None
Seneca Foods	Canned Vegetables	1982	160	UFCW
Simmons USA	Mattresses	1980	128	None

(Click on any company for more info)

## Janesville

## Means

## Business!

FIG. 10

<b>EMPLOYERS</b>					
		<b>GO BACK</b>	<b>START OVER</b>	<b>INDEX SEARCH</b>	<b>PRINT</b>
Company	Product	Date Est.	No. Emp.	Union	
General Motors	Auto/Truck Assembly	1923	6000	UAW	
SSI Technologies	Powder Metals Products	1982	11,175	None	
Lab Safety Supply	Safety Equip. & Supplies	1969	620	None	
Accudyns	Ordinance	1971	575	UAW	
Parker Pen USA LTD	Pens	1888	550	UFW/IAM	
Leer Seating	Seating for Motor Veh.	1990	475	UAW	
Giddings & Lewis	Auto. Prod. Mach.	1935	450	IAM	
Prent Corp.	Thermofom Plastic Prod.	1967	406	None	
HUFCOR	Moveable Wall/Partition	1901	290	UFW	
Monterey Mills	File Fabrics	1966	240	ALCW/ILGWU	
Swing-N-Glide	Metal Fabricated Products	1982	200	None	
Janesville Group	Silk Screening	1987	180	None	
Seneca Foods	Canned Vegetables	1982	160	UFCW	
Simmons USA	Mattresses	1980	128	None	

(Click on any company for more info)

**General Motors Corporation**  
 1234 Randall Ave. Janesville, WI 54488 634-987-8876  
 Primary business: Automotive manufacturing.  
 Job Positions/Starting Salary Range: Assembly-\$12-\$18/hr.,  
 Clerical-\$7-\$9/hr., CAD operator-\$35k-\$55k/yr.,  
 Maintenance-\$10-\$13/hr.  
 Employment Outlook: The GM Corp. in Janesville has had  
 a steady growth in employees of about 5% per year over the  
 past 5 years.

3/18/96


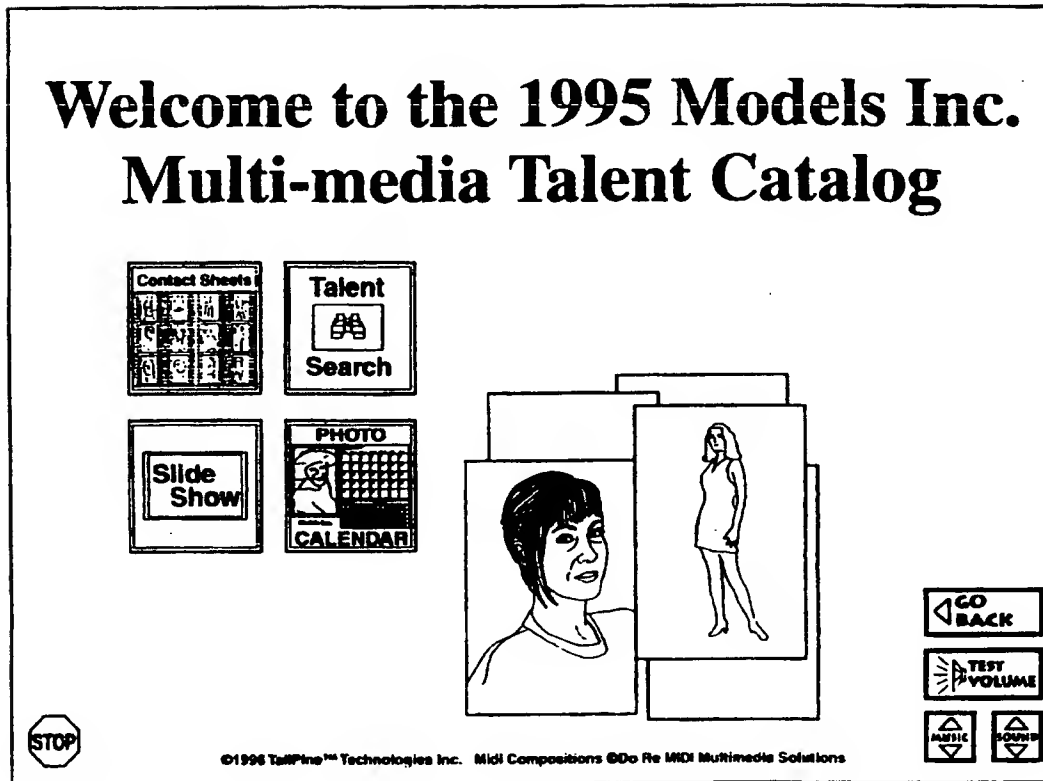
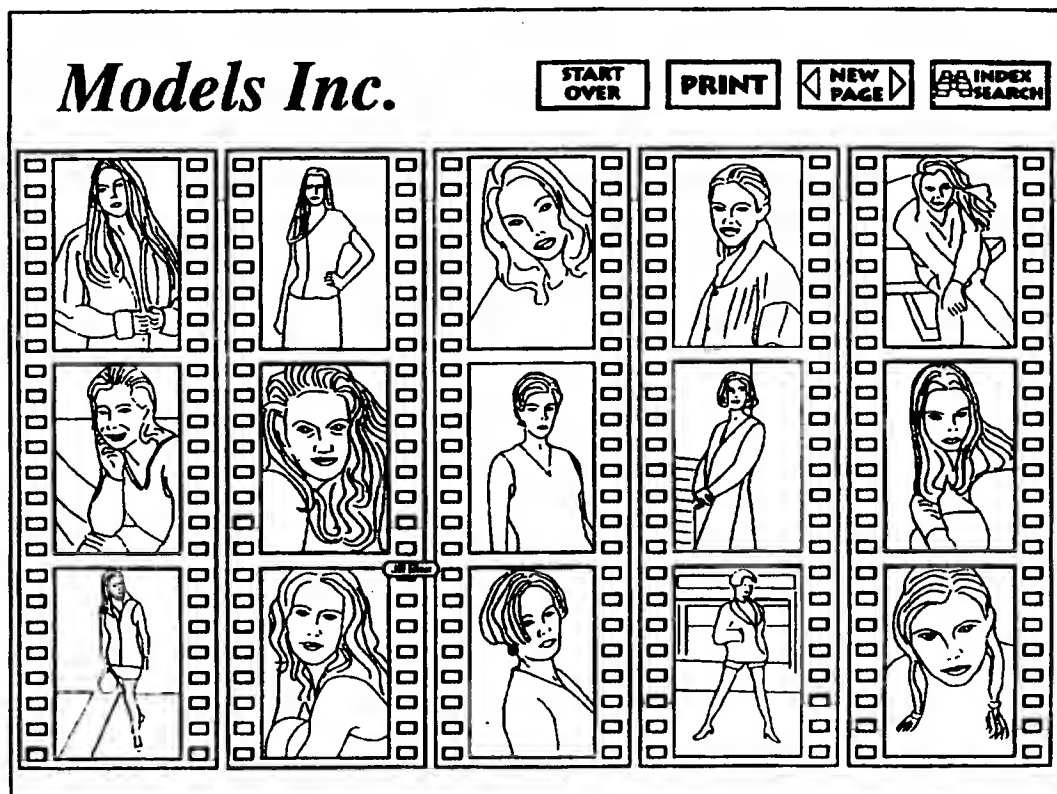


FIG. 11

**FIG. 12**

**FIG. 13**

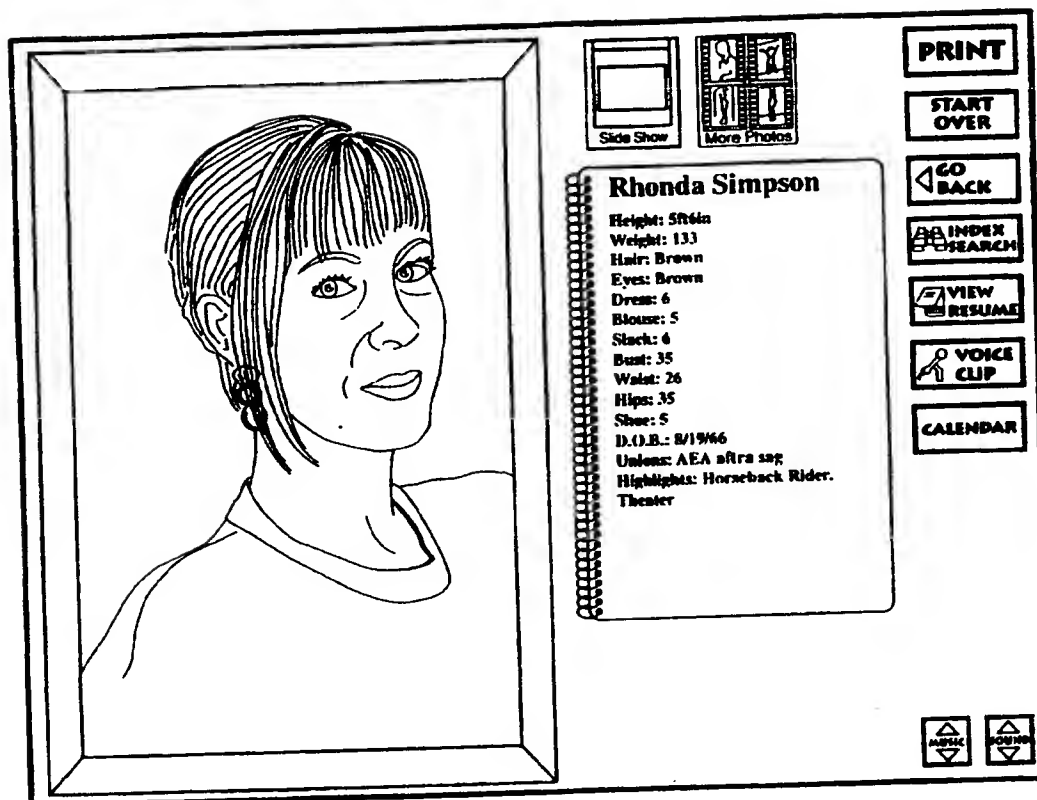



FIG. 14

<a href="#">GO BACK</a>	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	Print
-------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-------



Models Inc.

April, 1996

Sun	Mon	Tues	Wed	Thur	Fri	Sat
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30				

March, 1996

Sun	Mon	Tues	Wed	Thur	Fri	Sat
					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31						

May, 1996

Sun	Mon	Tues	Wed	Thur	Fri	Sat
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

**FIG. 15**

# INTERNATIONAL SEARCH REPORT

Intern. Appl. No.  
PCT/US 97/09542

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KOEGEL J F ET AL: "HyOctane: a HyTime engine for an MMIS" PROCEEDINGS ACM MULTIMEDIA 93, PROCEEDINGS OF FIRST ACM INTERNATIONAL CONFERENCE ON MULTIMEDIA, ANAHEIM, CA, USA, 2-6 AUG. 1993, ISBN 0-89791-596-8, 1993, NEW YORK, NY, USA, ACM, USA, pages 129-136, XP002042087 see the whole document	1,11,15, 24,26
A	---	2-10, 12-14, 16-23
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

29 September 1997

Date of mailing of the international search report

15.10.97

Name and mailing address of the ISA  
European Patent Office, P.B. 5018 Patentkan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fournier, C



# INTERNATIONAL SEARCH REPORT

Inter. nat. Application No  
PCT/US 97/09542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		Relevant to claim No.
Category *	Citation of document, with indication, where appropriate, of the relevant passages	
X	CRUZ G C ET AL: "The role of a descriptive markup language in the creation of interactive multimedia documents for customized electronic delivery"	1,15
A	EP90 PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON ELECTRONIC PUBLISHING, DOCUMENT MANIPULATION AND TYPOGRAPHY, GAITHERSBURG, MD, USA, 18-20 SEPT. 1990, ISBN 0-521-40246-8, 1990, CAMBRIDGE, UK, CAMBRIDGE UNIV. PRESS, UK, pages 277-290, XP002042088	2-14, 16-26
A	see page 280, paragraph 2 - page 284, paragraph 3	
A	see page 286, paragraph 4.2 - page 288, paragraph 5	
A	--- MCCABE E M: "Sliding into mathematics: creative use of widgets for engineering the universe"	1,15
A	EUROGRAPHICS UK. CONFERENCE PROCEEDINGS 1995, PROCEEDINGS EUROGRAPHICS UK CONFERENCE, LOUGHBOROUGH, UK, 28-30 MARCH 1995, ISBN 0-9521097-2-7, 1995, ABINGDON, UK, EUROGRAPHICS UK, UK, pages 233-247, XP002042089	
A	see page 234, paragraph 1	
A	--- DE 39 40 051 A (AMERICAN TELEPHONE & TELEGRAPH) 7 June 1990	2,3,16, 17
	see abstract	
	-----	

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 97/09542

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3940051 A	07-06-90	US 5027110 A JP 2212893 A	25-06-91 24-08-90
-----			